

Multi-Operation 2/2 Way Control Valve 1500 bar

Z 80-3 e

01.04.2008



Application:

The valves are useable as multi-operation control valves for gun operation as well as control valves for hydroforming, testing grounds, etc. Only use with KSP 3000 electric or DUMP GUN 1500 electric

Model:

Pilot-controlled ball-seat valve

Material:

All parts coming into contact with fluid medium in stainless steel. Also available in seawater-resistant materials on request

Activity:

pneumatically or electrically

Example assembly:

4x operator pneumatic control mobile cpl. with control box, cable reel and pneumatic hose reel


Technical data:

Medium: 1000 mPas
 Flow rate: max. 40 l/ min
 Working pressure: max. 1500 bar
 Flow rate direction: from "P" to "A"
 Electrically: standard 24V DC
 Pneumatically: 6 bar
 Other voltage e.g. 220 V, 12 V, explosion proof or ATEX on request

Connection:

1x Inlet M 26 x 1.5 female with
 Hose adapter M 26 x1.5 - M 22 x 1.5 DKL Part no. 7009212
 Hose adapter M 26 x1.5 - M 24 x 1.5 DKO Part no. 7009213

Outlet M 26 x 1.5 female for each operator with
 Hose adapter M 26 x1.5 - M 22 x 1.5 DKL Part no. 7009212
 Hose adapter M 26 x1.5 - M 24 x 1.5 DKO Part no. 7009213

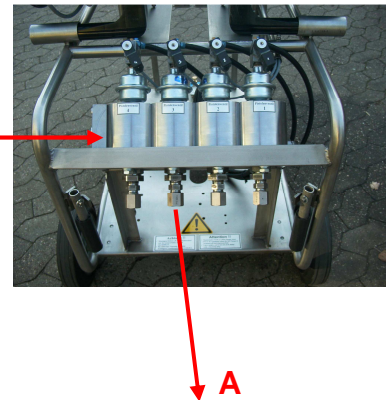

Pneumatic version

1x operator pneumatic control	Part no. 7010792
2x operator pneumatic control	Part no. 7011111
3x operator pneumatic control	Part no. 7011110
4x operator pneumatic control	Part no. 7011099



Electric version 24 V

1x operator electric control	Part no. 7011424
2x operator electric control	Part no. 7011425
3x operator electric control	Part no. 7011426
4x operator electric control	Part no. 7011427



Cartridge repair kit for each valve Part no. 7012314